
TWIT
250 SEAL








Model	Nominal		Nominal		Thermal Movement (JO _T)				Seismic Movement (JOs)				Total (JO∆)	
Number	(1O ^N)		(SL _N)		Minimum		Maximum		Minimum		Maximum		Movement	
ABC-250	1.75	45	5.375	137	0.750	19	2.50	64	0.75	19	3.25	83	2.50	64
ABC-350	2.50	64	6.375	162	1.000	25	3.50	89	1.00	25	4.25	108	3.25	83
ABC-450	3.00	76	7.375	187	1.500	38	4.50	114	1.50	38	5.50	140	4.00	102
ABC-550	4.00	102	8.375	213	1.500	38	5.50	140	1.500	38	6.50	165	5.000	127

Dimension shown in inches (bold) and millimeters. JO = Joint Opening. SL = Sight Line. Color Options for rubber seals are Black or Special Order Gray. Elevation Tolerence-Surface areas two feet on each side of the expansion joint opening shall have identical elevations creating flush slab-to-slab transition.

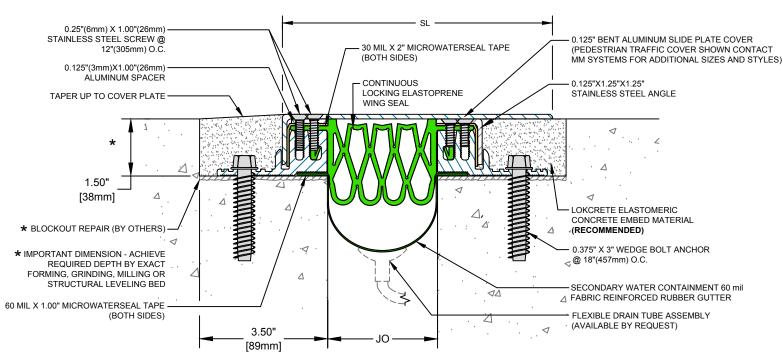

ABC Series Expansion Joint (Slab-to-Slab)

M M SYSTEMS

50 MM WAY PENDERGRASS, GA. 30567 706-824-7500 PHONE 800-241-3460 TOLL FREE 706-824-7501 FAX

www.mm-usa.com

For Spec-Data, Install Guides and other data visit www.mm-usa.com.

RIGHTS OF DESIGN

All rights of design, detail, engineering and/or invention contained herein are the property of MM Systems Corporation and hereby reserved and are not to be reproduced or provided to any other party. MM Systems Corporation reserves the right to amend or withdraw any information contained herein without notice and will not be liable for any inaccuracy or ambiguity of said information.

Armored Bolt-Down Cover Strip Expansion Joint ABC-Series/Surface Mount Cover

Drawn by:	Scale:				
DMW	NTS				
SHT. 1 OF 1	Issue Date: 03-10-2016				

Drawing Number:

31875-01