
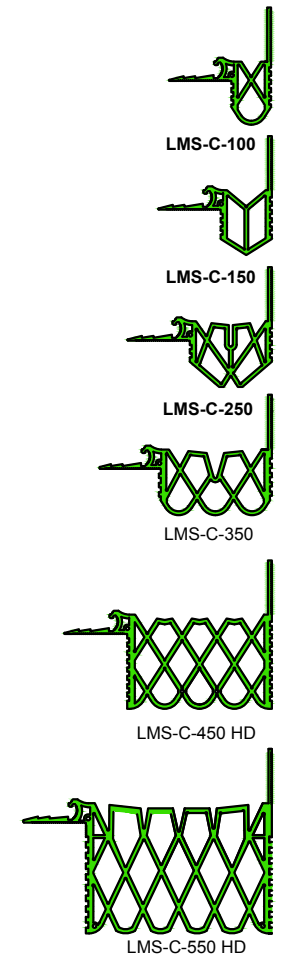


SEAL PROFILES

Model Number	Nominal (JO _N)		Nominal (SL _N)		Thermal Movement (JO _T)		Seismic Movement (JO _S)		Total (JO _T) Movement	Seal Depth (SD)		
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum		Minimum	Maximum	
LMS-C-100	0.625	16	1.0625	27	0.375	10	1.00	25	0.875	22	2.500	64
LMS-C-150	1.000	25	1.4375	37	0.500	13	1.50	38	1.250	32	2.750	70
LMS-C-250	1.750	44	2.1875	56	0.750	19	2.50	64	2.500	64	2.750	70
LMS-C-350	2.500	64	2.9375	75	1.000	25	3.50	89	3.250	83	2.625	67
LMS-C-450HD	3.000	76	3.4375	87	1.500	38	4.500	114	4.000	102	4.000	102
LMS-C-550HD	4.500	114	4.9375	125	2.000	51	6.000	152	5.000	127	4.500	114

Dimension shown in inches (bold) and millimeters. JO = Joint Opening. SL = Sight Line. Color Options for rubber seals and LokCrete are Black or Special Order Gray. Elevation Tolerance-Surface areas two feet on each side of the expansion joint opening shall have identical elevations creating flush slab-to-slab transition.

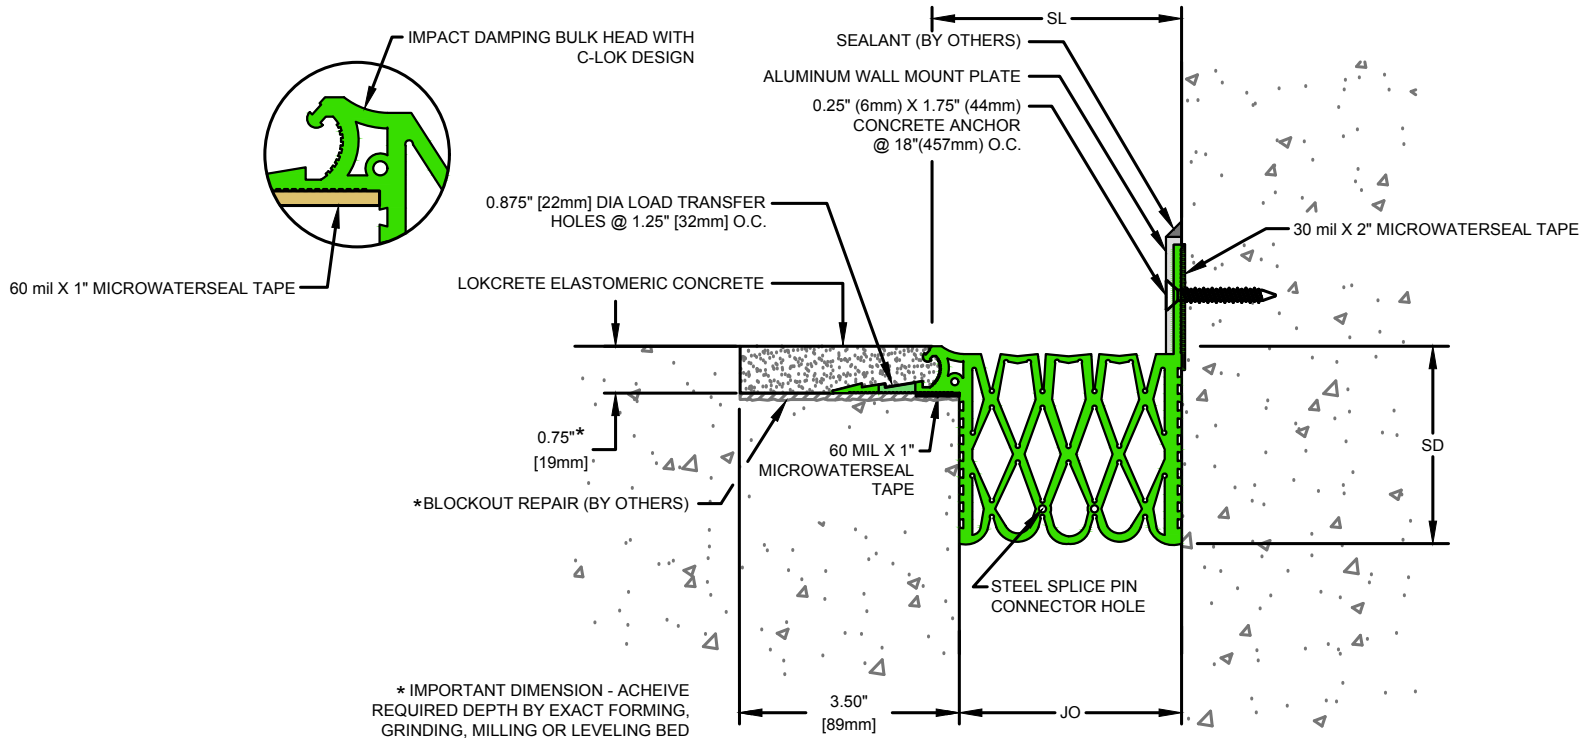

LMS Series Expansion Joint (Slab-to-Wall)



50 MM WAY
 PENDERGRASS, GA. 30567
 706-824-7500 PHONE
 800-241-3460 TOLL FREE
 706-824-7501 FAX

www.mm-usa.com

For Spec-Data, Install Guides and other data visit www.mm-usa.com.

RIGHTS OF DESIGN

All rights of design, detail, engineering and/or invention contained herein are the property of MM Systems Corporation and hereby reserved and are not to be reproduced or provided to any other party. MM Systems Corporation reserves the right to amend or withdraw any information contained herein without notice and will not be liable for any inaccuracy or ambiguity of said information.

LokCrete Membrane Seal Expansion Joint

LMS-C Series

Drawn by: DMW	Scale: NTS	Drawing Number: 30100-02
SHT. 1 OF 1	Issue Date: 05-02-2018	