
Model	Load	Nominal (JO _N)		Nominal (SL _N)		Thermal Movement (JO _T)				Seismic Movement (JOs)				Total (JO∆)	
Number	Rating					Minimum		Maximum		Minimum		Maximum		Movement	
RSC-450	Vehicular / Pedestrian	1.00	25	13.00	330	0.00	0	1.50	38	0.00	0	4.50	114	4.50	114
RSC-450	Vehicular / Pedestrian	2.00	51	13.00	330	0.00	0	3.00	76	0.00	0	4.50	114	4.50	114
RSC-450	Vehicular / Pedestrian	3.00	76	13.00	330	0.00	0	4.50	114	0.00	0	4.50	114	4.50	114
RSC-850	Vehicular / Pedestrian	4.00	102	17.00	432	0.00	0	6.00	152	0.00	0	8.25	210	8.00	203
RSC-850	Vehicular / Pedestrian	5.00	127	17.00	432	0.00	0	7.50	191	0.00	0	8.25	210	8.00	203
RSC-1000	Vehicular / Pedestrian	6.00	152	18.50	470	0.00	0	9.00	229	0.00	0	10.00	254	9.00	229
RSC-1000	Vehicular / Pedestrain	7.00	178	20.50	521	0.00	0	10.00	254	0.00	0	10.00	254	10.50	267
RSC-1200	Vehicular / Pedestrian	8.00	279	20.50	521	0.00	0	12.00	305	0.00	0	12.00	305	13.00	330

Dimension shown in inches (bold) and millimeters. Contact MM Systems for larger size systems.



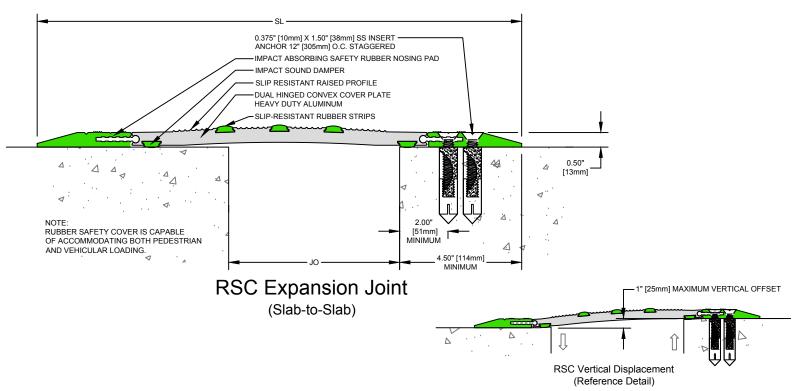

50 MM WAY PENDERGRASS, GA. 30567 706-824-7500 PHONE 800-241-3460 TOLL FREE 706-824-7501 FAX

www.mm-usa.com

For Spec-Data, Install Guides, and other data visit www.mm-usa.com.

RIGHTS OF DESIGN

All rights of design, detail, engineering and/or invention contained herein are the property of MM Systems Corporation and hereby reserved and are not to be reproduced or provided to any other party. MM Systems Corporation reserves the right to amend or withdraw any information contained herein without notice and will not be liable for any inaccuracy or ambiguity of said information.

Rubber Safety Cover Expansion Joint RSC Series

Drawn by:	Scale:				
DMW	NTS				
SHT. 1 OF 1	Issue Date: 12-28-2017				

Drawing Number:

31700-01