



**RUBBER SEAL PROFILES**

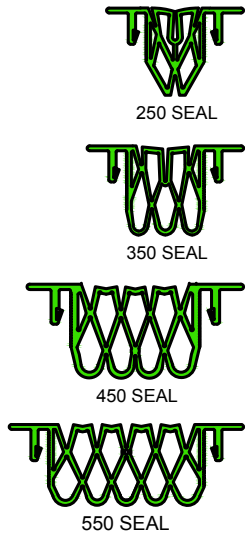

Model Number	Nominal (JO <sub>v</sub> )		Nominal (SL <sub>v</sub> )		Thermal Movement (JO <sub>t</sub> )		Seismic Movement (JO <sub>s</sub> )		Total (JO <sub>t</sub> ) Movement					
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum				
SSM-250	<b>1.50</b>	38	<b>4.00</b>	102	<b>0.75</b>	19	<b>2.50</b>	64	<b>0.75</b>	19	<b>3.25</b>	83	<b>2.50</b>	64
SSM-350	<b>2.00</b>	57	<b>4.75</b>	121	<b>1.00</b>	25	<b>3.50</b>	89	<b>1.00</b>	25	<b>4.25</b>	108	<b>3.25</b>	83
SSM-450	<b>3.00</b>	76	<b>5.50</b>	140	<b>1.50</b>	38	<b>4.50</b>	114	<b>1.50</b>	38	<b>5.50</b>	140	<b>4.00</b>	102
SSM-550	<b>4.00</b>	102	<b>6.50</b>	165	<b>1.50</b>	38	<b>5.50</b>	140	<b>1.50</b>	38	<b>6.50</b>	165	<b>5.00</b>	127

Dimension shown in inches (bold) and millimeters. JO = Joint Opening. SL = Sight Line. Color Options for rubber seals are Black or Special Order Gray.

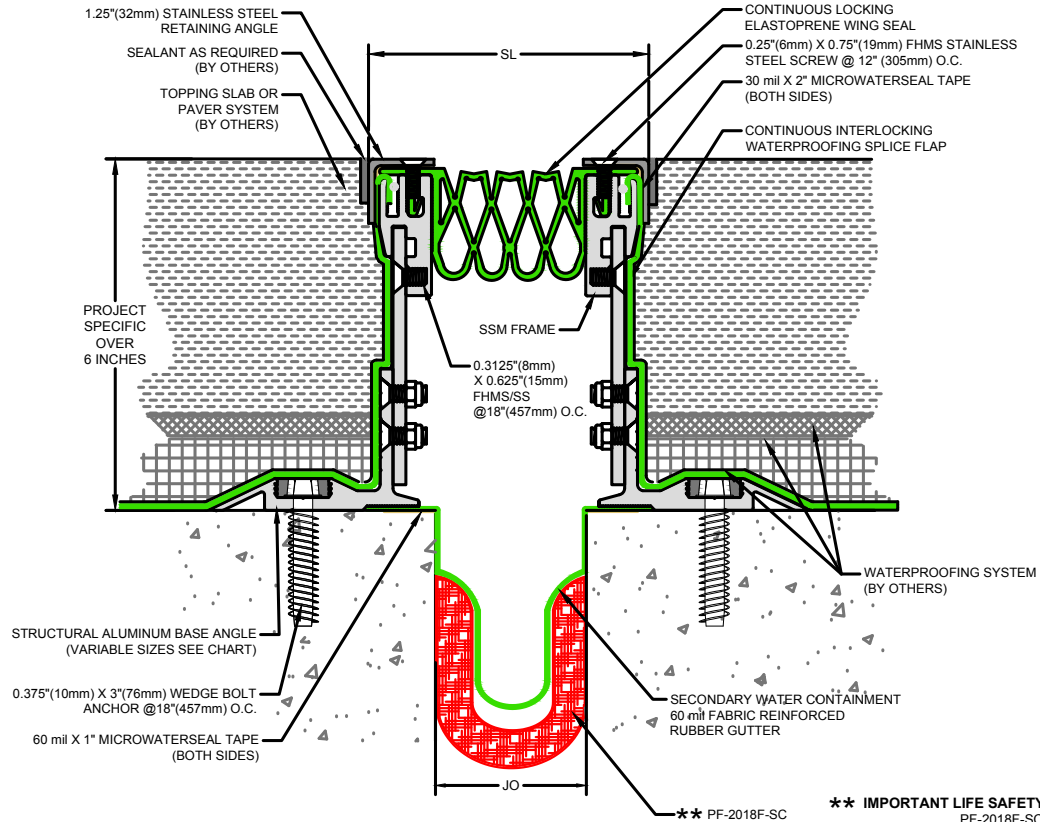

**SSM Series Adjustable Height Expansion Joint**  
(Slab-to-Slab)

**\*\* IMPORTANT LIFE SAFETY PRODUCT NOTE**  
PF-2018F-SC  
2-HOUR FIRE BARRIER MUST BE INSTALLED IN 2-HOUR RATED SLAB WITH MINIMUM 4.50\"/>



50 MM WAY  
PENDERGRASS, GA. 30567  
706-824-7500 PHONE  
866-506-6929 TOLL FREE  
706-824-7501 FAX

[www.mm-usa.com](http://www.mm-usa.com)

For Spec-Data, Install Guides and other data visit [www.mm-usa.com](http://www.mm-usa.com).

**RIGHTS OF DESIGN**

All rights of design, detail, engineering and/or invention contained herein are the property of MM Systems Corporation and hereby reserved and are not to be reproduced or provided to any other party. MM Systems Corporation reserves the right to amend or withdraw any information contained herein without notice and will not be liable for any inaccuracy or ambiguity of said information.

**Split Slab Membrane System Expansion Joint**  
**SSM Adjustable Height Fire Rated**

Drawn by: DMW	Scale: NTS	Drawing Number: <b>41203-06</b>
SHT. 1 OF 1	Issue Date: 07-14-2017	