


Model Number	Nominal (JO _n)		Nominal (SL _n)		Thermal Movement (JO _t)			Seismic Movement (JO _s)			Total (JO _t)		Blockout Width (BW)		Slide Plate Thickness (ST)		Slide Plate Width (SW)		Blockout Depth (BD)			
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum		
SSP-C-400	4.00	102	8.25	210	3.00	76	5.00	127	1.75	44	5.00	127	3.25	83	4.50	114	0.375	10	5.50	140	2.00	51
SSP-C-600	6.00	152	10.25	260	4.50	114	7.50	191	1.75	44	7.50	191	5.75	146	5.50	140	0.375	10	8.00	203	2.00	51
SSP-C-800	8.00	203	12.75	470	6.00	152	10.00	254	1.75	44	10.00	254	10.50	267	6.50	165	0.375	10	10.50	267	2.00	51

Dimension shown in inches (bold) and millimeters. JO = Joint Opening. SL = Sight Line. Color Options for rubber seals are Black or Special Order Gray. Refer to drawings 31300-06 for SSP-C-200 and 31300-04 for SSP-C-1000 EHD / SSP-C-1200 EHD.



**SSP Series Expansion Joint
(Slab-to-Wall)**

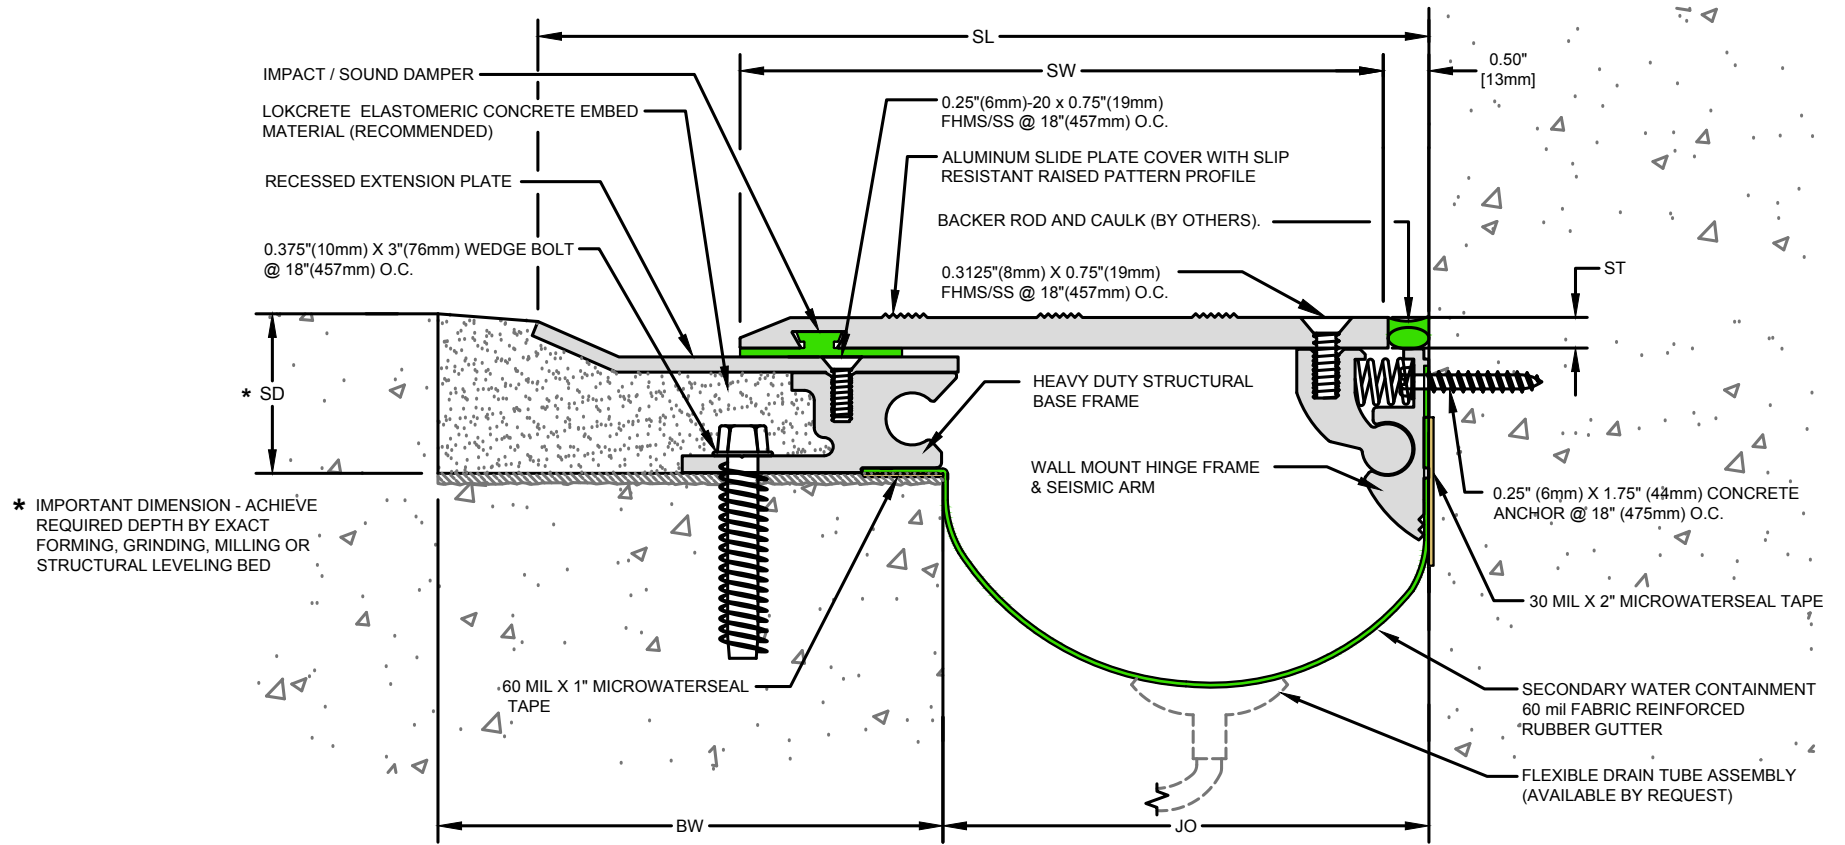

50 MM WAY
PENDERGRASS, GA. 30567
706-824-7500 PHONE
800-241-3460 TOLL FREE
706-824-7501 FAX

www.mm-usa.com

For Spec-Data, Install Guides and other data visit www.mm-usa.com.

RIGHTS OF DESIGN

All rights of design, detail, engineering and/or invention contained herein are the property of MM Systems Corporation and hereby reserved and are not to be reproduced or provided to any other party. MM Systems Corporation reserves the right to amend or withdraw any information contained herein without notice and will not be liable for any inaccuracy or ambiguity of said information.

**Seismic Slide Plate Expansion Joint
SSP-C-400, 600 & 800 Series**

Drawn by: DMW	Scale: NTS	Drawing Number: 31300-02
SHT. 1 OF 1	Issue Date: 02-09-2017	